




539AFP / 550CAP Arched Front Cast Iron Plates For 530 DV Heater

Sept 06

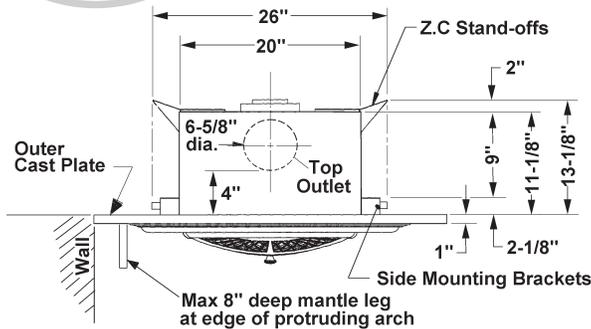


Top View


| Mantle Clearances | |
|-------------------|------------------------------------|
| 'X' | 'Y' |
| 1" - 6" | 34" |
| 7" - 8" | 36" |
| 9" - 12" | 38" |
| 12" + | 38" + 1" for every inch beyond 12" |

Notes


- These framing Cavity Dimensions Vary from those used with other 530 front trims and are therefore specific to the 539/550 trims only.
- Venting capabilities are otherwise similar for all trim variations. The 530 Heater with 539/550 Fronts may be installed with the following venting configurations:
 - Rear or Top Outlet Direct Vent Terminating Through Wall or Through Roof
 - Converted to Co-Linear venting using 2 x 3" flex liners for installation into existing fireplace applications.
 - (refer to installation manual for full description of venting capabilities).
- These trims may also be used with the DZ1GEC Electric Fireplace (see separate information sheets).

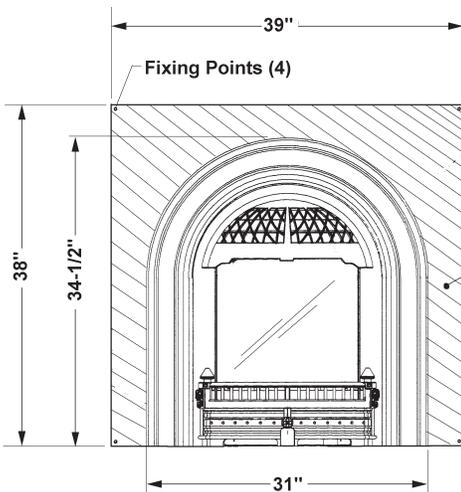


**Front View
(539 version)**

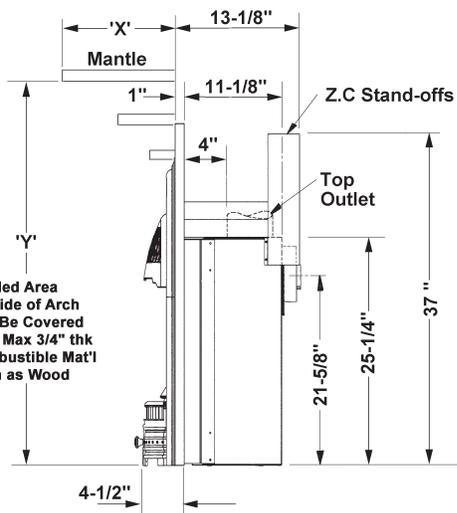

Side View

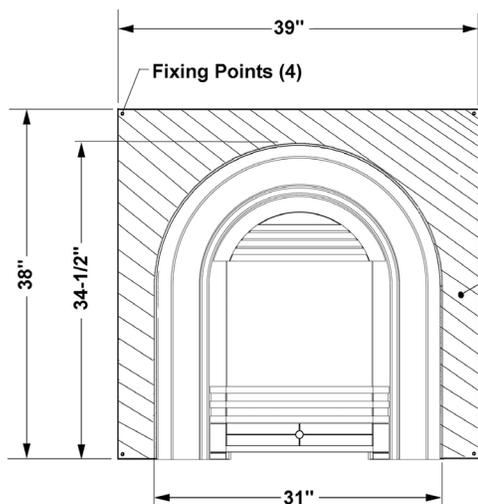

**Front View
(550 version)**

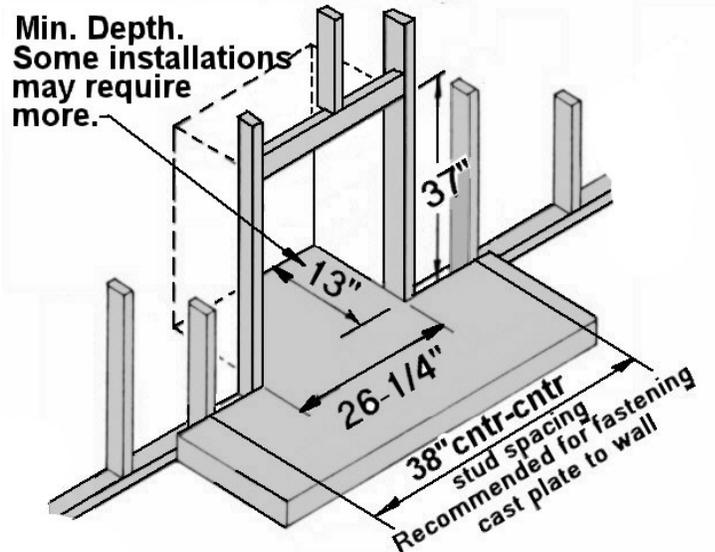

Minimum Framing Cavity